cashdisplay

www.cashdisplay.com


ENGLISH

DISPLAY DIGITAL 55”

TECHNICAL SHEET


Before using the equipment, please read this manual carefully and keep it for reference when needed.

Reference **14345**

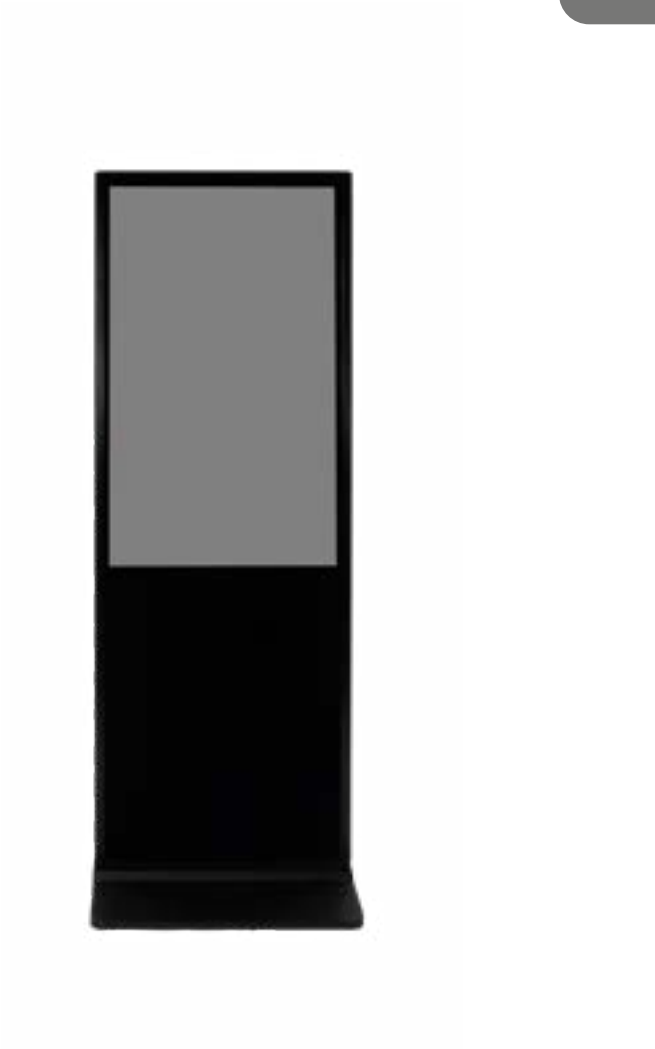


Installation


The indoor ultra-thin LCD standing digital sign is divided into two parts, one is the body, and the other is the base. When assembling, the two parts need to be assembled together and fixed with bolts from the bottom of the base. As shown in the following figure:

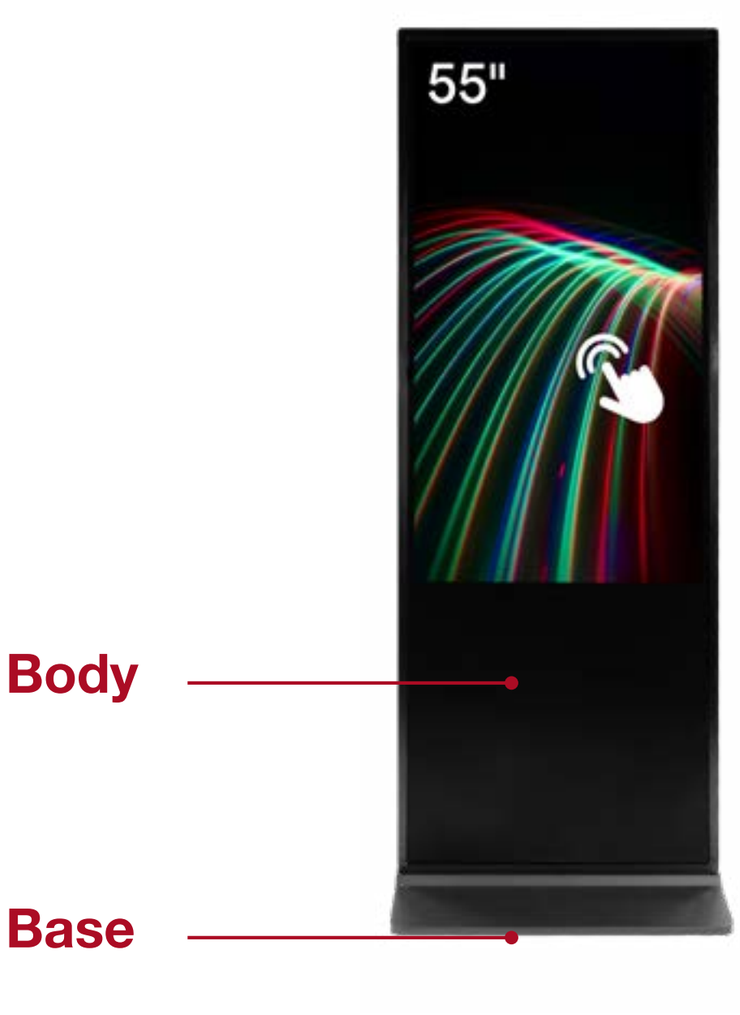

Step 1:
After unpacking, move the machine body onto the workbench, and use bolts to lock the base and the machine body (Note: it is recommended to lay a clean foam cotton on the table, place the screen horizontally in the direction of foam cotton, and make sure it will not shake, so as to avoid damaging the machine or even damaging the screen during installation). The installation is shown in the following figure:

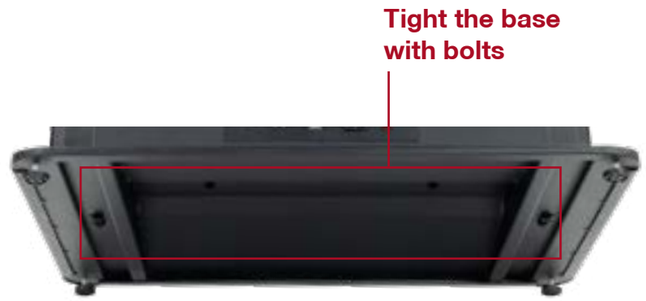

Step 2:
After installation, connect the power cord and turn on the power switch to turn on the standing advertising
machine. The machine interface is shown in the following figure:

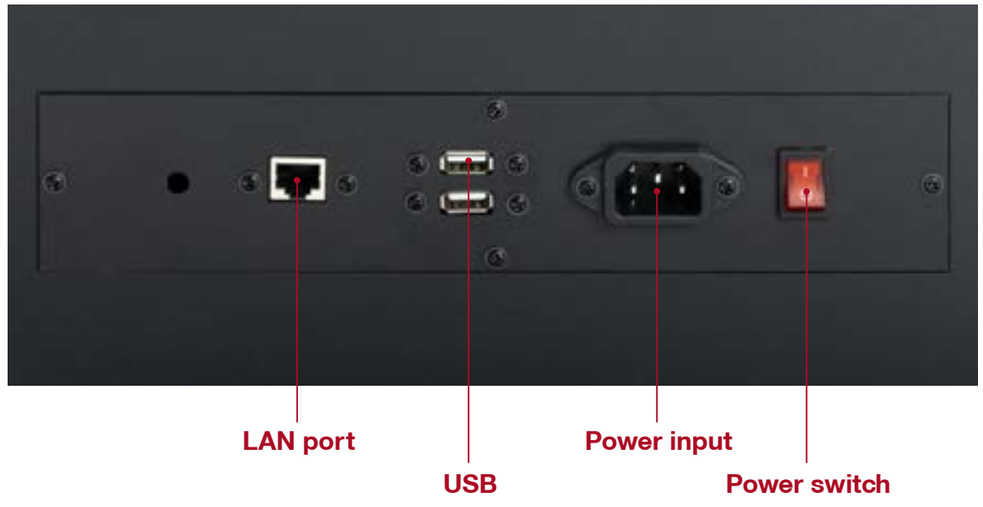

Specification

Product Parameters	
Size	1810x593x22.3 mm (Base size: 610.6x450x60mm)
Material	Aluminum Alloy Tempered Glass
Weight	40Kg
Signal output	Support HDMI output
Audio	binaural
Decoding function	Support video, picture, text, with CMS
Operating Voltage	110V/220V,50/60Hz
Power	63W

Screen parameter	
Screen size	Single-side 43Inch
Aspect ratio	16:9
Resolution	1920x1080
Display area	939.2x527.4mm
Brightness	350nits
Contrast ratio	1100:1
Viewing angle	89/89/89/89 (Typ.)(CR≥10)
Response time	8ms
Life	50000hours
Power	53W

Android Board Parameters	
CPU	RK3288 1.6GHz Cortex-A17 Quad Core GPU Mail-T764
RAM	DDR3 2GB (Default 2GB, 4GB optional)
Storage	EMMC 8GB (Default 8GB 16GB/32G B optional)
Decoding resolution	Support 1080P 4K, H264, H265 hard decoding
OS	Android 7.1/5.1 ,default 7.1
Network	RJ45 Interface Support Ethernet (4G network optional support) Equipped with WIFI module, supporting 2.4G/5GWi Fi (default 2.4G, 5G/BT optional)
Video format	Support wmv, avi, flv, rmvb, mp4, mpeg, ts.. etc
Photo format	Support BMP, JPEG, PNG, GIF.. etc
USB External port	2 USB2.0 (1 USB OTG)
Camera interface	1 MIPI camera interface, supporting a maximum of 1300W pixels
HDMI output	1 HDMI interface, supporting 4K/1080P output
Audio output	Left and right dual channel output, supporting 8R * 3W/4R * 6W dual speakers

PC motherboard parameters (optional)	
CPU	i3 3217U
RAM	1*DDR3 SODIMM Support 8GB
Display function	Integrated with Inter HD 4000 graphics controller, supporting single display, dual display replication, and dual display expansion
Hard disk	128G storage (optional), 1 standard SATA3.0 hard disk interface, maximum transmission speed 6.0Gbps
Network functions	Gigabit network card chip, supporting network wake-up/PXE function Supports wifi/3G/4G modules
Operating systems	WinXP, Win7, Win8, Win10.. etc

cashdisplay

www.cashdisplay.com

ESPAÑOL

DISPLAY DIGITAL 55”

FICHA TÉCNICA


Antes de utilizar el equipo, lea este manual con atención y consérvelo para consultarlo cuando lo necesite.

Referencia **14345**



Instalación

El letrero digital LCD de pie ultrafino para interiores se divide en dos partes, una es el cuerpo y la otra es la base. Al ensamblar, las dos partes deben unirse y fijarse con pernos desde la parte inferior de la base. Como se muestra en la siguiente figura:

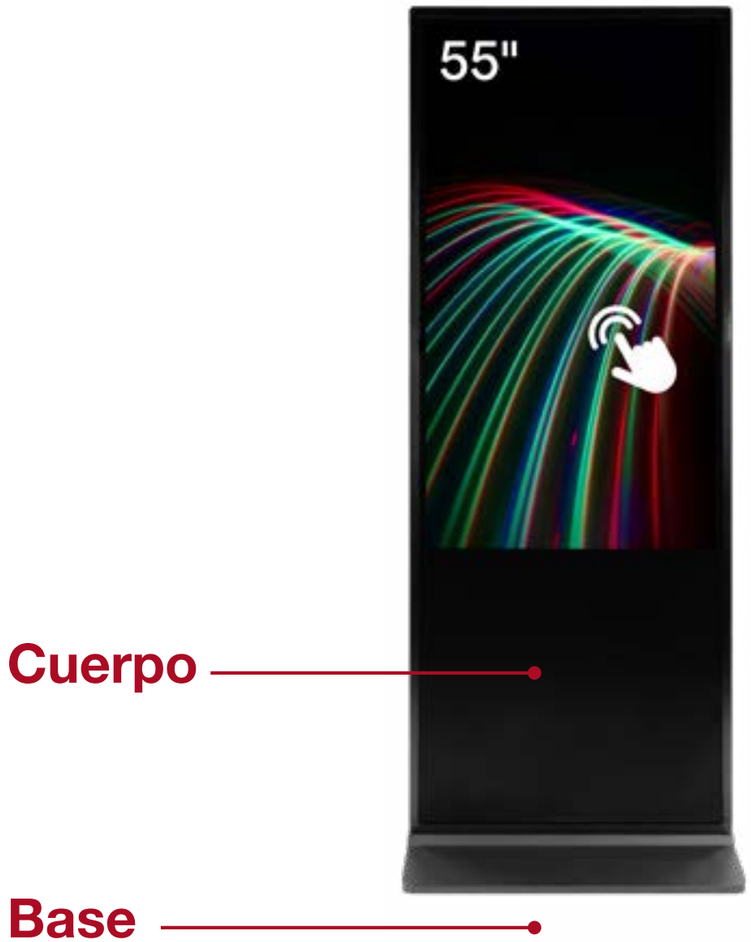

Paso 1:
Después de desempaquetar, coloque el cuerpo de la máquina sobre el banco de trabajo y use pernos para asegurar la base y el cuerpo de la máquina (Nota: se recomienda colocar un algodón limpio sobre la mesa, colocar la pantalla horizontalmente en la dirección del algodón y asegurarse de que no se mueva, para evitar dañar la máquina o incluso la pantalla durante la instalación). La instalación se muestra en la siguiente figura:



Paso 2:
Después de la instalación, conecte el cable de alimentación y encienda el interruptor de encendido para encender la máquina publicitaria de pie. La interfaz de la máquina se muestra en la siguiente figura:



Especificaciones

Parámetros del Producto	
Medidas	1810x593x22.3 mm (Base: 7610.6x450x60mm)
Material	Cristal templado de aleación de aluminio
Peso	40Kg
Salida de Señal	Soporte de salida HDMI
Audio	Binaural
Función de Decodificación	Soporta video, imágenes, texto, con CMS
Voltaje de Operación	110V/220V,50/60Hz
Potencia	63W

Parámetros de la pantalla	
Tamaño de la pantalla	43 Pulgadas de un solo lado
Relación de aspecto	16:9
Resolución	1920x1080
Área de visualización	939.2x527.4mm
Brillo	350nits
Relación de contraste	1100:1
Ángulo de visión	89/89/89/89 (Typ.)(CR≥10)
Tiempo de respuesta	8ms
Vida útil	50000 horas
Potencia	53W

Parámetros de la Placa Android	
CPU	RK3288 1.6GHz Cortex-A17 Quad Core GPU Mail-T764
RAM	DDR3 2GB (2GB predeterminado, 4GB opcional)
Almacenamiento	EMMC 8GB (8GB predeterminado 16GB/32G B opcional)
Resolución de decodificación	Admite 1080P 4K, H264, H265
OS	Android 7.1/5.1 ,predeterminado 7,1
Red	Soporte de interfaz RJ45 Ethernet (soporte 4G opcional de red) Equipado con módulo WIFI, compatible con 2,4G/5GWi Fi (por defecto 2,4G, 5G/BT opcional)
Formato de video	Soporta wmv, avi, flv, rmvb, mp4, mpeg, ts.. etc
Formato de foto	Soporta BMP, JPEG, PNG, GIF.. etc
Puerto externo USB	2 USB2.0 (1 USB OTG)
Interfaz de cámara	1 MIPI interfaz de la cámara, soportando un máximo de 1300W pixeles
Salida HDMI.	1 interfaz HDMI, compatible con salida 4K/1080P
Salida de audio	Salida de doble canal izquierdo y derecho, compatible con altavoces duales 8R * 3W/4R * 6W

Parámetros de la placa base de PC (opcional)	
CPU	i3 3217U
RAM	1*DDR3 SODIMM Support 8GB
Función de visualización	Integrated with Inter HD 4000 graphics controller, supporting single display, dual display replication, and dual display expansion
Disco duro	128G storage (optional), 1 standard SATA3.0 hard disk interface, maximum transmission speed 6.0Gbps
Funciones de red	Gigabit network card chip, supporting network wake-up/PXE function Supports wifi/3G/4G modules
Sistemas operativos	WinXP, Win7, Win8, Win10.. etc