cashdisplay

www.cashdisplay.com

ENGLISH

DISPLAY DIGITAL 55”

TECHNICAL SHEET


Before using the equipment, please read this manual carefully and keep it for reference when needed.

Reference **14270 | 14271**




Installation


The indoor ultra-thin LCD standing digital sign is divided into two parts, one is the body, and the other is the base. When assembling, the two parts need to be assembled together and fixed with bolts from the bottom of the base. As shown in the following figure:

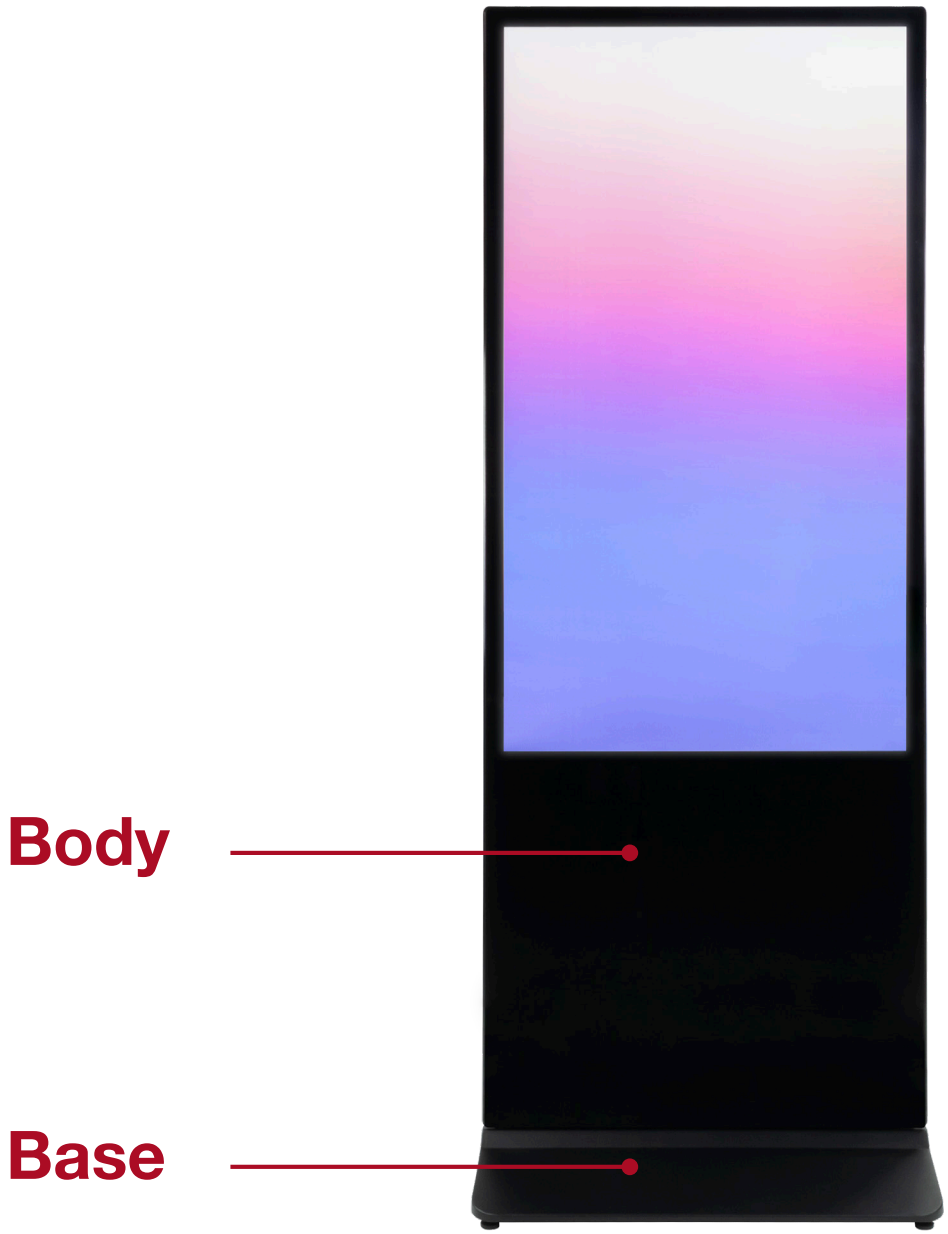

Step 1:
After unpacking, move the machine body onto the workbench, and use bolts to lock the base and the machine body (Note: it is recommended to lay a clean foam cotton on the table, place the screen horizontally in the direction of foam cotton, and make sure it will not shake, so as to avoid damaging the machine or even damaging the screen during installation). The installation is shown in the following figure:

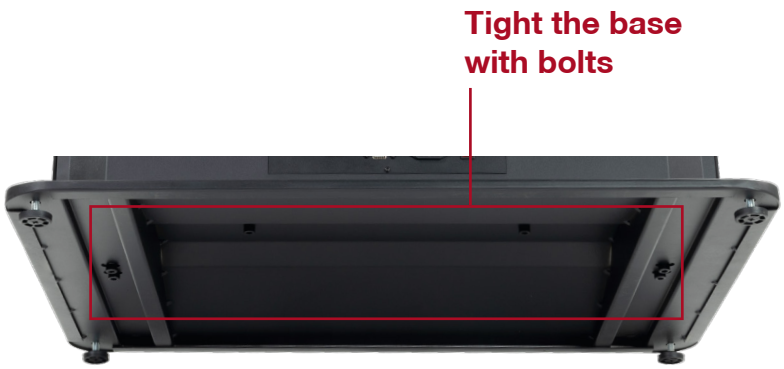

Step 2:
After installation, connect the power cord and turn on the power switch to turn on the standing advertising
machine. The machine interface is shown in the following figure:

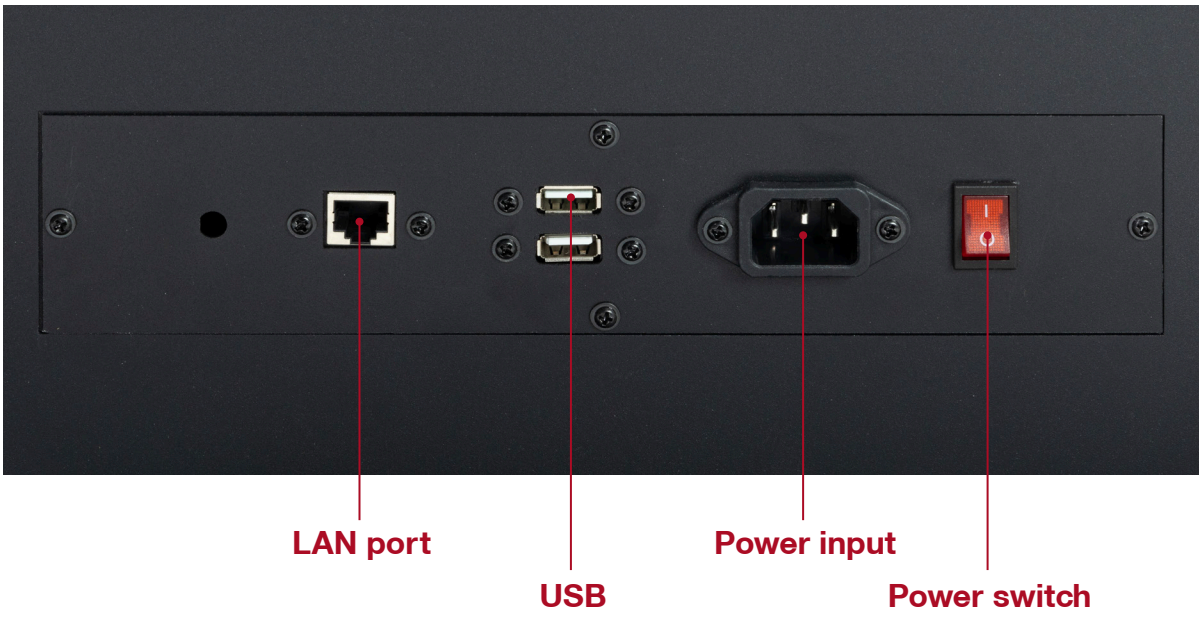

Specification

Product Parameters	
Size	1940x750x23 mm (Base size: 750x65x500mm)
Material	Aluminum Alloy Tempered Glass
Weight	53Kg
Signal output	Support HDMI output
Audio	binaural
Decoding function	Support video, picture, text, with CMS
Operating Voltage	110V/220V,50/60Hz
Power	92W

Screen parameter	
Screen size	Single-side 55Inch
Aspect ratio	16:9
Resolution	1920x1080
Display area	1208.6x679.4mm
Brightness	350nits
Contrast ratio	1100:1
Viewing angle	89/89/89/89 (Typ.)(CR≥10)
Response time	8ms
Life	50000hours
Power	82W

Android Board Parameters	
CPU	RK3288 1.6GHz Cortex-A17 Quad Core GPU Mail-T764
RAM	DDR3 2GB (Default 2GB, 4GB optional)
Storage	EMMC 8GB (Default 8GB 16GB/32G B optional)
Decoding resolution	Support 1080P 4K, H264, H265 hard decoding
OS	Android 7.1/5.1 ,default 7.1
Network	RJ45 Interface Support Ethernet (4G network optional support) Equipped with WIFI module, supporting 2.4G/5GWi Fi (default 2.4G, 5G/BT optional)
Video format	Support wmv, avi, flv, rmvb, mp4, mpeg, ts.. etc
Photo format	Support BMP, JPEG, PNG, GIF.. etc
USB External port	2 USB2.0 (1 USB OTG)
Camera interface	1 MIPI camera interface, supporting a maximum of 1300W pixels
HDMI output	1 HDMI interface, supporting 4K/1080P output
Audio output	Left and right dual channel output, supporting 8R * 3W/4R * 6W dual speakers

PC motherboard parameters (optional)	
CPU	i3 3217U
RAM	1*DDR3 SODIMM Support 8GB
Display function	Integrated with Inter HD 4000 graphics controller, supporting single display, dual display replication, and dual display expansion
Hard disk	128G storage (optional), 1 standard SATA3.0 hard disk interface, maximum transmission speed 6.0Gbps
Network functions	Gigabit network card chip, supporting network wake-up/PXE function Supports wifi/3G/4G modules
Operating systems	WinXP, Win7, Win8, Win10.. etc